

PETTIBONE®


» TRAVERSE T944

SPECIFICATIONS



The Pettibone® Traverse™ T944 telehandler provides peak performance in all conditions. Excellent operator visibility, 4-wheel drive maneuverability and exceptional reach and lift capabilities allow the T944 to work safely and efficiently on a wide variety of jobsites. Horizontal boom transfer of 70 inches further enhances load handling, while rapid response hydraulics and joystick control allow users to move loads confidently and consistently.


SPECIFICATIONS

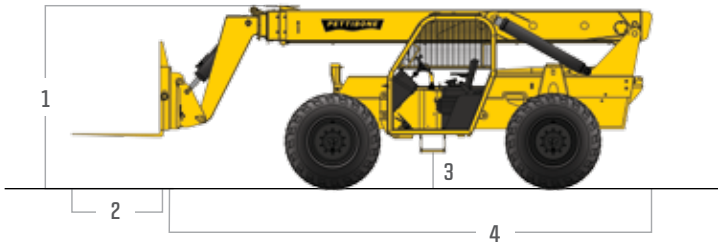


DIMENSIONS	
1 Height	7' 11" (243 cm) boom down
2 Fork Carriage	48" (122 cm) standard
3 Ground Clearance	18" (46 cm)
4 Length	22' (671 cm) to fork frame
Overall Width	8' 6" (259 cm)
Pallet Forks	2.25 x 4 x 48" standard
Total Operating Weight	27,730 lbs (12,578 kg)
ENGINE	
Model/Power	110 HP (82 kW) Cummins® Tier III turbo diesel with electronic control & protection
Fuel Tank	32.6 gal. (123.4 L)
HYDRAULIC SYSTEM	
Features	Piston pump, auxiliary boom tip hydraulics, quick disconnect for attachments
PERFORMANCE	
Max Load Capacity	9,000 lbs (4,082 kg)
Maximum Lift Height	44' 6" (1,356 cm)
Maximum Forward Reach	36' 1" (1,100 cm) at 24" LC 30' 3" (922 cm) at 24" LC (non-traversed)
Below Grade Reach	3' 1" (94 cm)
Maximum Travel Speed	20 mph (32 km/h)
Turning Radius	12' 6" (381 cm)
Transfer	5' 10" (178 cm) horizontal boom travel
Frame	24° of leveling (12° right and left); rear axle stabilization system; fits under 8' doorway
Transmission	Fully modulated Carraro® Powershift, 4-speed forward & reverse; parking brake engaged transmission declutch
Axles	Carraro outboard planetary; 4-wheel drive
Steering	4 wheel, 2 wheel, and crab steer
Brakes	Oil-immersed inboard disc service brakes, integral park brake
Tires	13.00 x 24, 14 ply
Boom	Automatic fork leveling without slave cylinders; 2 wide stance, heavy-duty lift cylinders

LIFT PERFORMANCE

Standard Fork Frame

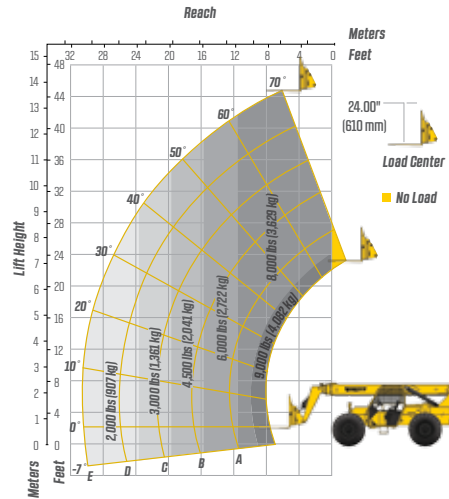

Standard Fork Frame

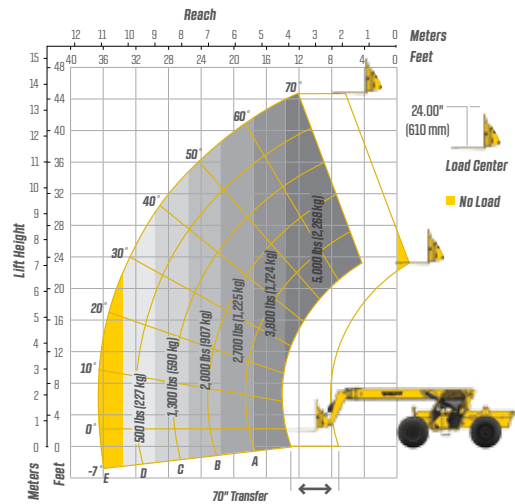

FEATURES & OPTIONS

OPERATOR CAB	
Adjustable suspension seat with seat belt	Machine level indicator
Fully adjustable right-side armrest	Single multifunction hydraulic joystick
Cab step	ROPS/FOPS
AVAILABLE ATTACHMENTS	
Pallet, lumber and block forks	Truss boom
Side tilt carriages +/- 10°	Utility buckets
OPTIONS	
GPS equipment management system	Foam-filled tires
Light packages	Enclosed cab

* Specifications are subject to change.



PETTIBONE, LLC
 1100 Superior Avenue
 Baraga, MI 49908
 P: 800.467.3884
 info@gopettibone.com
 www.gopettibone.com



1 Year	Full machine and attachment
2 Years	Powertrain and major hydraulic components
3 Years	Machine structure

WARRANTY