

PETTIBONE®


» SPEED SWING 360

SPECIFICATIONS



Durably built to tackle a variety of rail applications, the Pettibone® Speed Swing™ 360 is a versatile machine that provides the power to lay rails, set ties or clear the path ahead. The unit features a turbo diesel engine and 360-degree boom rotation for optimal jobsite productivity. Offering precise hydraulics, numerous attachments and the ability to work both on and off the rails, the Speed Swing 360 is equipped for any rail task.

SPECIFICATIONS

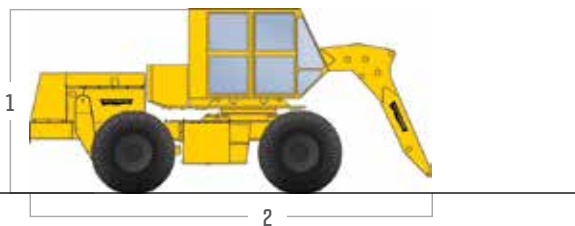

DIMENSIONS		
1	Height	10' 9" (328 cm)
2	Length	26' 10" (818 cm)
	Width	8' 8" (264 cm)
	Weight	45,535 lbs (20,654 kg) with Hi-rail 40,535 lbs (18,386 kg) without Hi-rail
ENGINE		
	Model/Power	190 HP (142 kW) Cummins® QSB6.7L
	Fuel Tank	100 gal. (379 L)
	Heating	Engine block heater
HYDRAULIC SYSTEM		
	Controls	IQAN® electronic
	Tank	75 gal. (284 L) with dirt box filtration
	Gear Pump	19 gpm (72 LPM) at 2,200 RPM for dedicated steering
	Piston Pump	80 gpm (303 LPM) at 2,200 RPM for all non-steering functions
PERFORMANCE		
	Max Load Capacity (On Tires)	15,000 lbs (6,804 kg) front 12,000 lbs (5,443 kg) side
	Max Load Capacity (On Hi-Rail)	15,000 lbs (6,804 kg) front 8,000 lbs (3,629 kg) side
	Boom Rotation	360° continuous
	Maximum Travel Speed	25 mph (40 km/h)
	Transmission	Dana® T32000; electric powershift control
	Drive	4-wheel with rear wheel disconnect; hi/low range
	Brakes	4-wheel outboard dry disc service brakes, spring-applied hydraulic release park break
	Tires	Front and rear 16.00 R25

FEATURES & OPTIONS

OPERATOR CAB

ROPS/FOPS with tinted safety glass Front and rear window wipes	Digital display
-------------------------------------------------------------------	-----------------

AVAILABLE ATTACHMENTS

Drawbar coupler Rail threader Magnet Switch broom Auger Grapple Clamshell Gribbing bucket V-type snow plow Back filler blade	Loader bucket Track cleaning bucket Snow bucket Extendable boom Lattice boom Tote hooks Backhoe Brush cutter Front-mounted winch
---------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------

OPTIONS

Hi-rails (insulated or non) Warning beacon Rail sanders Train brakes Passenger seat Air conditioner Cab heater Emergency power unit Machine fluid heaters	Hydraulic top-off system Turn signals/hazard lights Lighting package Front and rear fenders Heavy-duty rear bumper Vandal covers Spare tire carrier Tanks and tool box locks
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

* Specifications are subject to change.

PETTIBONE®

PETTIBONE, LLC

1100 Superior Avenue
Baraga, MI 49908

P: 800.467.3884
info@gopettibone.com
www.gopettibone.com

**1 - 2 - 3
WARRANTY**

WARRANTY	
1 Year	Full machine and attachment
2 Years	Powertrain and major hydraulic components
3 Years	Machine structure